




GRP Grating - 50 mm heavy duty/yellow

FLEXI-GRP-K550-25-5 YELLOW

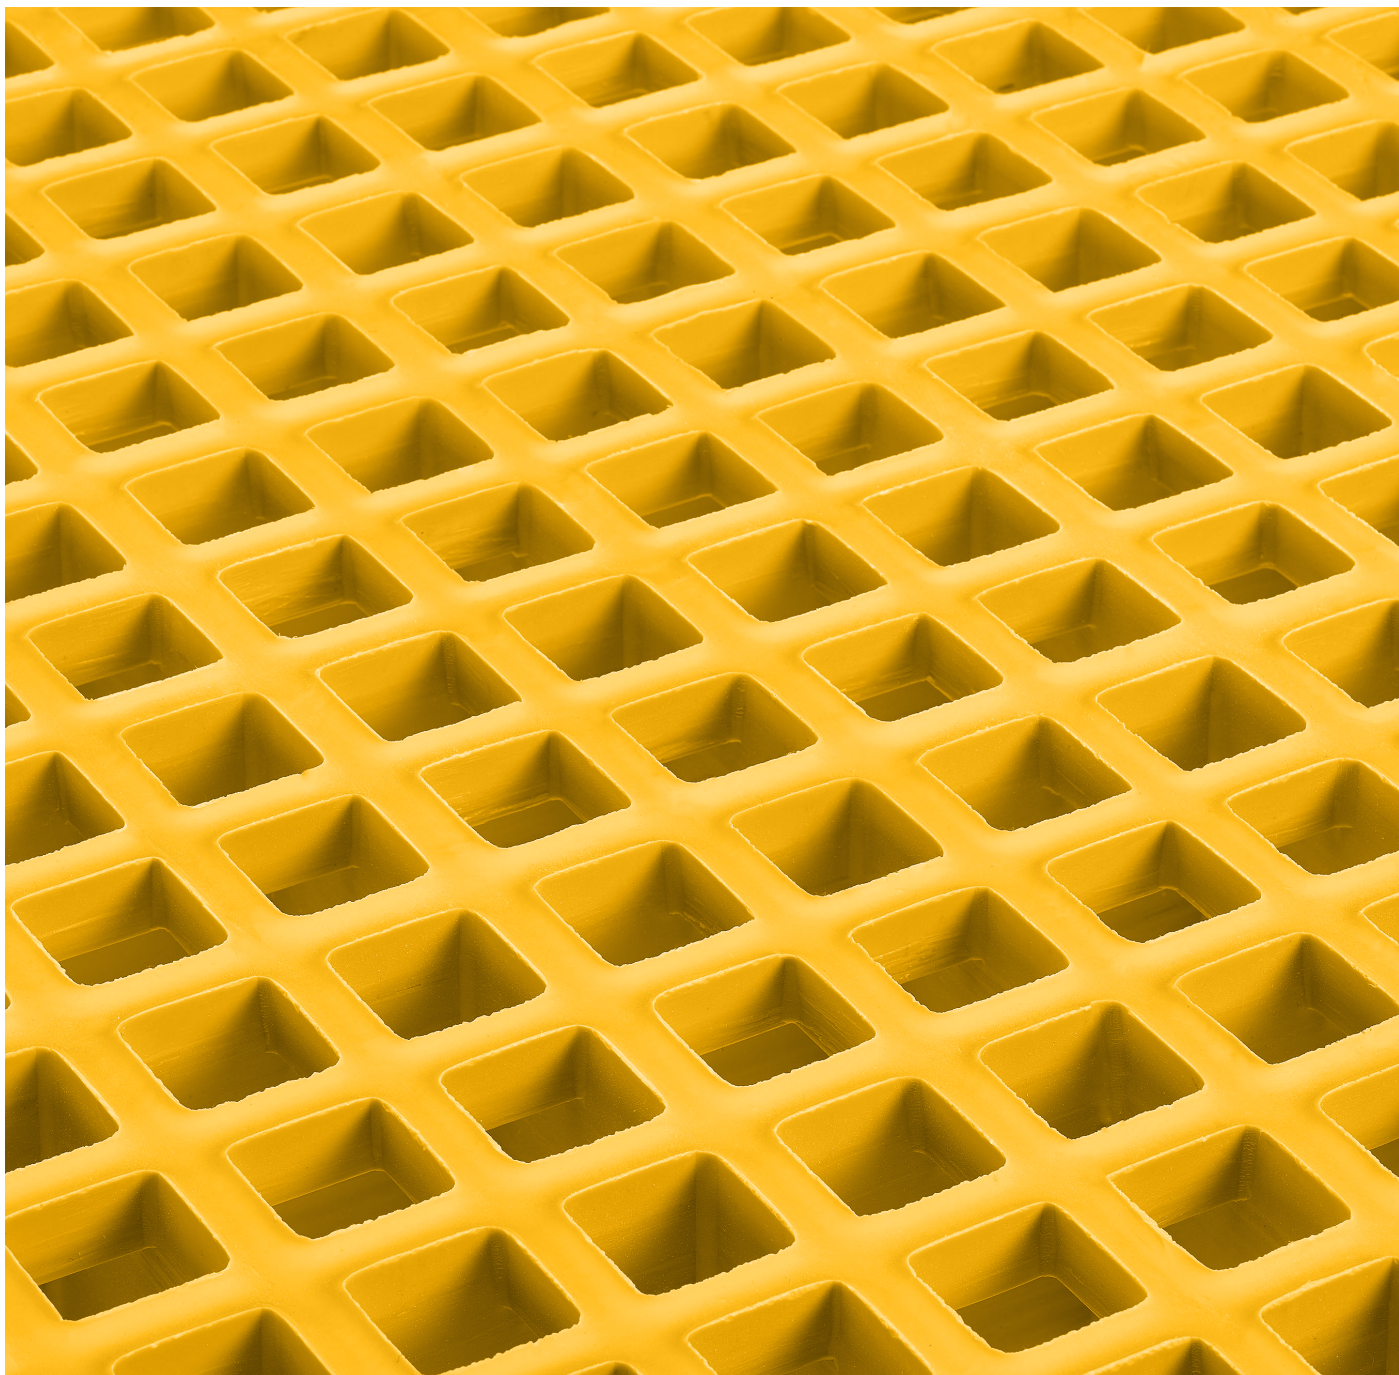

Flexi Riste A/S
Hjejlevej 10
DK - 7480 Vildbjerg
(+45) 97 13 32 11
mail@flexiriste.dk
www.flexiriste.dk

FLEXI-GRP-K550-25-5 YELLOW

Properties

Matrix	Orthophtalic, isophtalic or vinylester (several standard colours)
Reinforcement	E-Glass
Colour	yellow, near RAL 1003
Height	50 mm
Surface	concave
Width of bars	5,00 – 7,50 mm
Pitch (C/C)	25,40 x 25,40 mm
Meshwidth	17,90 x 17,90 mm
Standard panel size	1227 x 3666 mm

Tolerances:

Length / width	+ 0 / - 4 mm
Height	+ 1 / - 1 mm

Fixing possibilities:

Clamp fixing	B15025 TR
Direct	B620 TR

We supply all fixings for GRP gratings in galvanized steel, stainless steel AISI304 and stainless steel AISI316

Mechanical properties

Weight	23,40 kg/m ²
Matrix content	ca. 68 %
Glassfiber content	ca. 32 % (DIN 1172)
Density	1,8 kg/dm ³
Serration class	R13 V10 (DIN 51130 og ASR A1 1.5/1,2)
E-Modulus	14.500 MPa (DIN EN ISO 178)
Max. bending stress	216 MPa
Area moment of inertia / 1 bar	82898,15 mm ⁴
Section modulus / 1 bar	2783,89 mm ³

Thermal properties

Max. application temperature	- 30°C / + 70°C
Flammability	Bfl-s1 (DIN EN 13501-1)
Flammability regarding UL94	V-0 (DIN IEC EN 60695)

Electric properties

Leak resistor	electrically non-conducting
---------------------	-----------------------------

