




Pressure locked grating - Serrated - 30 mm

FLEXI-PX42-230-33/11-2

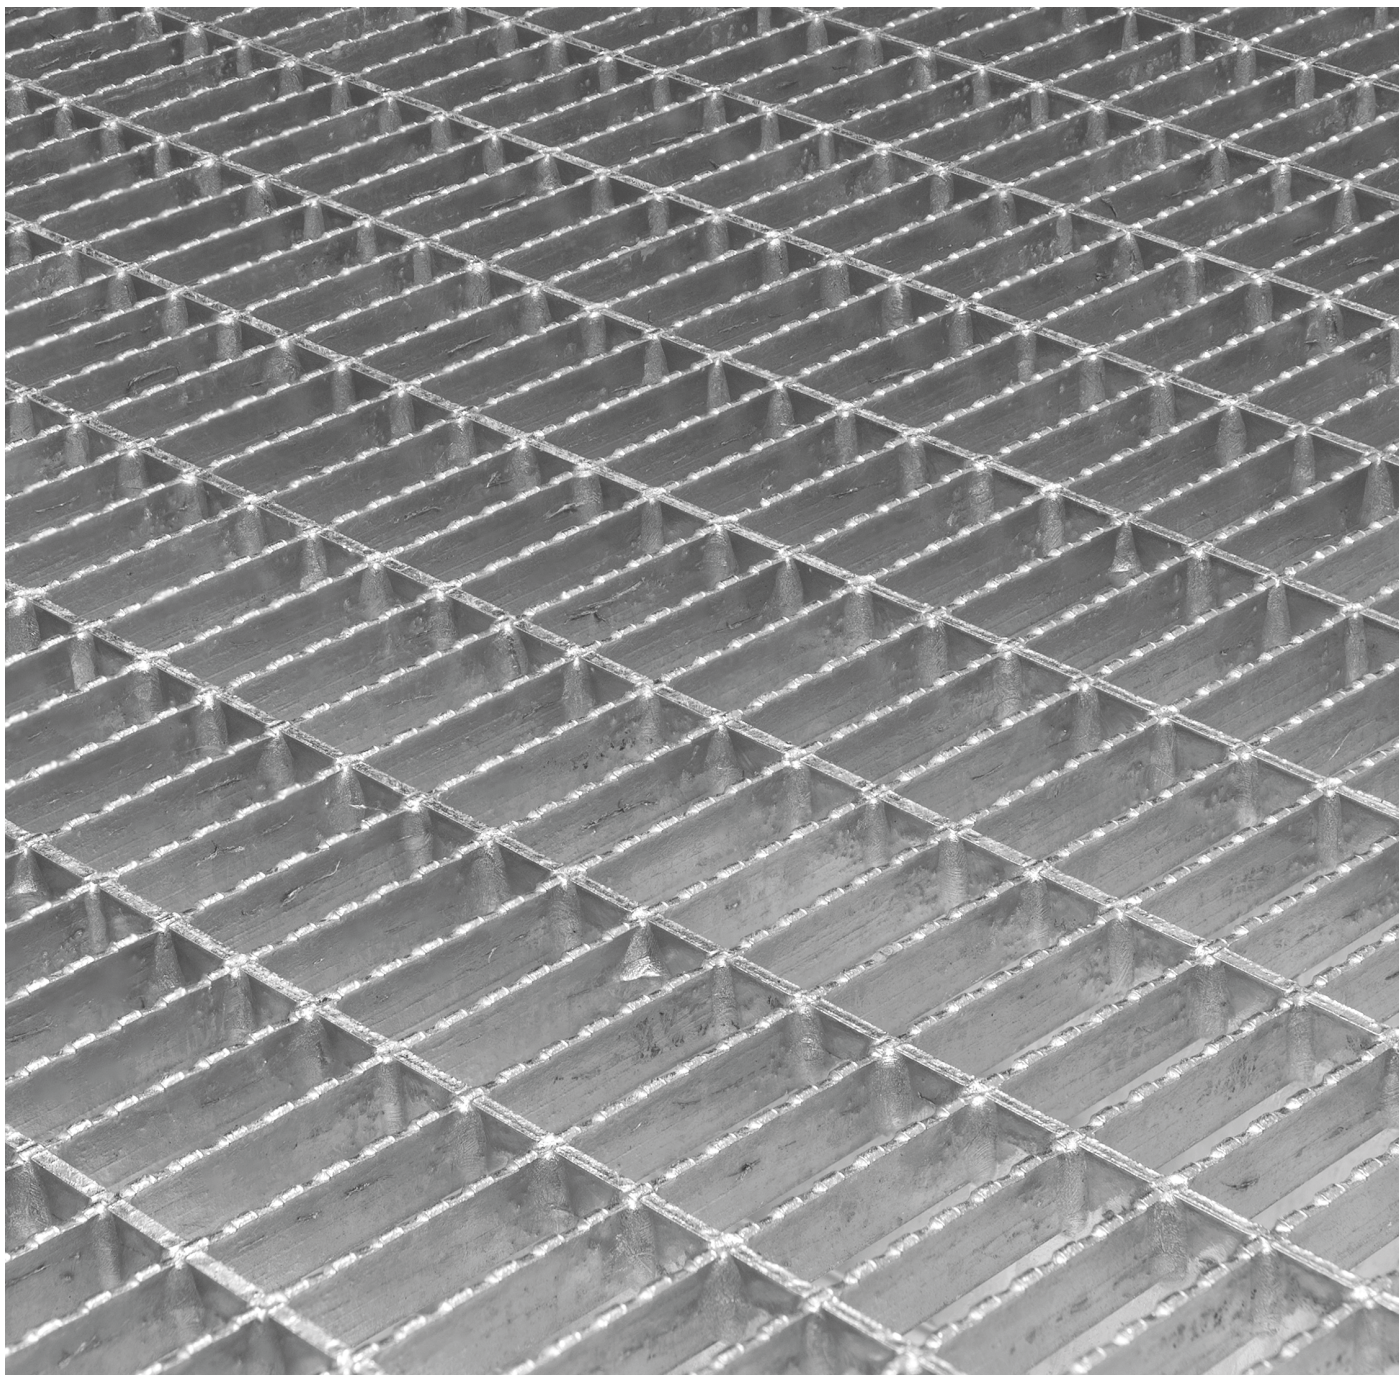

Flexi Riste A/S
Hjejlevej 10
DK - 7480 Vildbjerg
(+45) 97 13 32 11
mail@flexiriste.dk
www.flexiriste.dk

Properties

Material S235JR
 Surface treatment Hot dip galvanized according to DIN EN ISO 1461
 Serration class R11

Bearing bar height 30 mm
 Bearing bar thickness 2 mm
 Bearing bar spacing 33,33 mm
 Cross bar height 9 mm
 Cross bar thickness 1,6 mm
 Mesh size 33 x 11 mm
 Mesh opening 31 x 9 mm
 Edge bar 30 x 2 mm

Load according to EN ISO 14122
 Max. free span 1.000 mm
 Concentrated load 1,5 kN
 Load area 200 x 200 mm
 Deflection 3,93 mm

Distributed load 5 kN/m²
 Load area 2,55 mm

Weight 27,8 kg/m²

Flexi Riste supplies fixings in hot-dip galvanized steel, stainless steel AISI 304, and acid-resistant stainless steel AISI 316

