




Pressure locked grating - Stainless steel - 30 mm

FLEXI-PR330-33-3

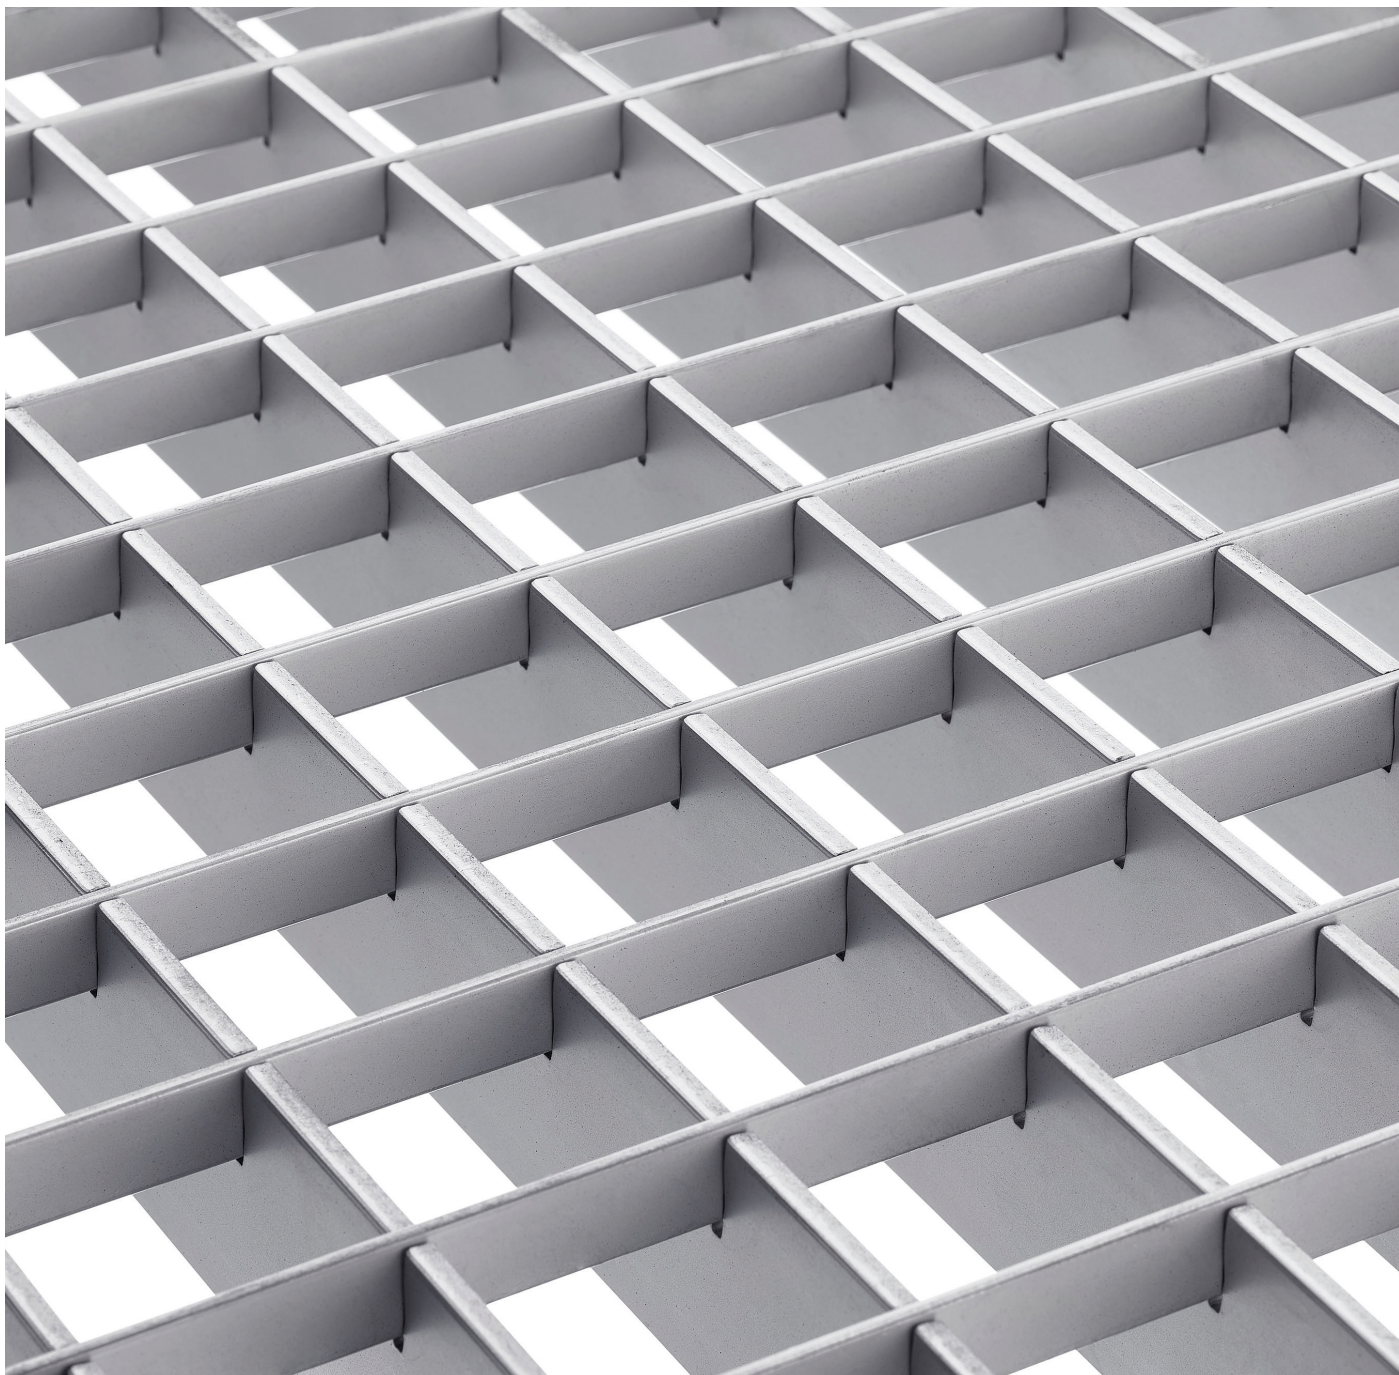

Flexi Riste A/S
Hjejlevej 10
DK - 7480 Vildbjerg
(+45) 97 13 32 11
mail@flexiriste.dk
www.flexiriste.dk

Properties

Material AISI304 / 1.4301
 Surface treatment Pickled
 Serration class R11

Bearing bar height 30 mm
 Bearing bar thickness 3 mm
 Bearing bar spacing 33,33 mm
 Cross bar height 9 mm
 Cross bar thickness 1,9 mm
 Cross bar spacing 33,33 mm
 Mesh opening 30 x 30 mm
 Edge bar 30 x 3 mm

Load according to EN ISO 14122
 Max. free span 1.130 mm
 Concentrated load 1,5 kN
 Load area 200 x 200 mm
 Deflection 3,99 mm

Distributed load 5 kN/m²
 Deflection 2,91 mm

Weight..... 29,5 kg/m²

Flexi Riste supplies fixings in hot-dip galvanized steel, stainless steel AISI 304, and acid-resistant stainless steel AISI 316

